



GASKET MACHINE

This machine allows you to make your connections with gaskets. It is a very easy and fast application. The approximate time it takes for the hydraulic system to mount two gaskets onto a 300 mm diameter coupling for all drives and movements is about 95 seconds.

Gasketed connections indicate air leakage in duct systems. Gasketed connections shorten the assembly time on-site, prevent the use of silicone sealant, and provide a Class "C" air tightness.




Technical Details

Power Supply	:	4,5 kw / 380-400 V/ 50hz 3P + N + PE
Diameter Range	:	125-1500 Mm/ 5 – 60Inch
Sheet Thickness	:	Galvanized 0,5-0,9 Mm
	:	Stainless Steel 0,5-0,8 Mm
Rollers Driving system	:	Hydraulic Driving
Gasket Size	:	7,5mm-9,2mm-10mm

HORIZONTAL DECOILER

The Horizontal Decoiler is designed to accommodate up to 3 sheet coils, allowing a smooth changeover and handling of the materials. decoiler's adaptive speed ability allows for easily integration with heavy duty Tubeformer machine or it could be adjusted to work with other types of machines, maintaining peak performance at maximum speed across a wide range of duct sizes.

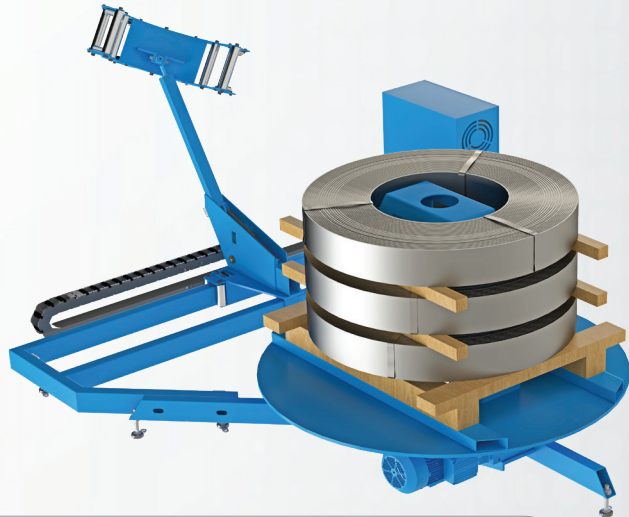

Technical Details

Power	:	7,5 KW
Voltage-Frequency	:	380/400 VAC 50-60 HZ 3PH + M +PE
Maximum Coil Weight	:	Max. 3 coil – 1000 kg each
Maximum Speed	:	100 m / min
Coil Size	:	Inner Diameter Minimum 508 mm (20")
	:	Outer Diameter Max. 1400 mm (55")
Sheet Thickness	:	0.4 – 1.6 mm (0.016" – 0.063")
Coil Width	:	Max. 150 mm (6")
Wight	:	750 kg